

Energizing Productivity Textile Machine

Situation:

Multiple drives are connected to one DC link.

Problem:

In case of power failure and thus reduction in speed to <10% the machines stop uncontrollably, leading to yarn breaking and -clewing. Restarting the machines can take hours, thus high downtime costs occur. Especially in production countries with instable grid power, power failures occur multiple times a day, so there this is an enormous problem.


Intention:

Controlled stop in case of power failure

thus avoiding long downtimes and high setup- and downtime costs as well as protecting the machine and saving material.

Solution:

- > Use of [PxtFX](#) via "Plug & Play": Supplying the drives with the energy that is necessary for a controlled stop.
- > Use of [NEV](#) to supply the 24V power grid for controls and sensorics.

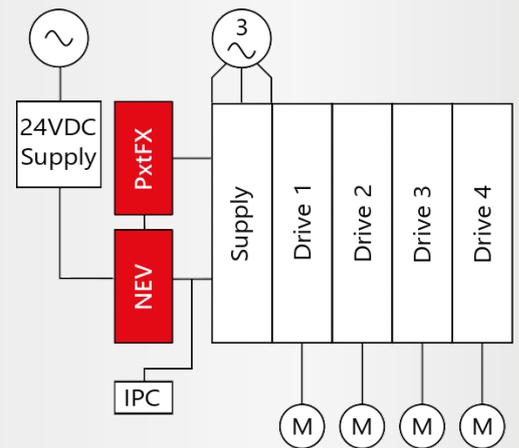

Results:

1. Controlled stop of the machine in case of power failure
2. Breaking and clewing yarn is avoided – tremendous time savings when restarting
3. Machine protection and material savings



Controlled stops on power failure



Compensate voltage dips



Bridging power failures

Further information:

[Textile Machine](#)

We look forward to hearing from you!

Technical data PxtFX

Version December 09, 2020

Criteria	PxtFX
Weight	6.0 kg (stand-alone) 9.6 kg (stand-alone with 1 energy module) 13.3 kg (stand-alone with 2 energy modules)
Dimensions H x W x D	297 x 100 x 167 mm (stand-alone) 297 x 100 x 276 mm (stand-alone with 1 energy module) 297 x 100 x 385 mm (stand-alone with 2 energy modules)
Ambient temperature	-10°C up to +65°C (transport, storage) 0°C up to +40°C (in operation)
Humidity	≤ 95% (transport, storage) ≤ 85% (in operation)
Cooling	Forced air cooling via fan. Operation in relation to heat sink temperature. Adjustable, e.g. for UPS application
Limitation for installations in elevated areas	<2000 m: No limitations / overvoltage category III >2000 m: reduction of performance / overvoltage category II
Recuperation of braking energy	Plug & Play due to automated detection of brake-chopper switch-on threshold U_{BRC}
Min. starting voltage level for the system (DC link or Energy storage)	Approx. 45 VDC
Min. Operating voltage level U_{Zmin}	180 VDC (Wake-up-phase: U_{Zstart} 48-180 VDC)
Max. Operating voltage level U_{Zmax}	848 VDC (UL) / 1000 VDC (IEC)
Operation conditions	$U_z > U_c$. Otherwise immediate stop = safe separation of DC link from energy storage
24 VDC In	Galvanically isolated For communication tasks with PxtFX without connecting it to DC link or energy storage, e.g. for setting parameters at the desk (Note: not protected against polarity reversal)
Energy of integrated capacities ¹	0 kJ (stand-alone) 2 kJ (stand-alone with 1 energy module) 4 kJ (stand-alone with 2 energy modules)
Expansion of capacities	No limitation, expandable with PxtEX or EM in steps of 2kJ

¹ Data refer to connection to a DC link of a drive controller with 400 V AC supply voltage. Other data on request.

We look forward to hearing from you!




Michael Koch GmbH, Zum Grenzgraben 28, 76698 Ubstadt-Weiher
Tel. +49 7251 9626-200, www.brakeenergy.com, mail@bremsenergie.de



Technical data PxtFX

Version December 09, 2020

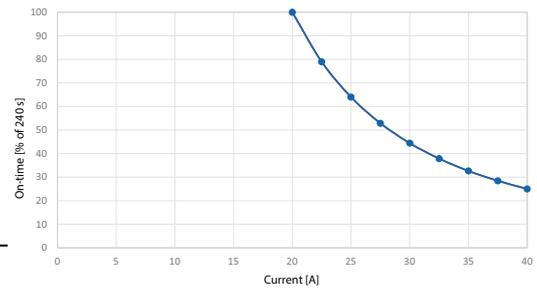PxtFX: Current Carrying Capacity
(I_{eff} max. 20 A)

Criteria	PxtFX
Max. Energy Storage current I_c	20 A continuous 40 A peak for 60s ($I_{\text{eff}} = 20$ A at $t_{\text{Cycle}} = 240$ s)
Max. Power P_{max}^1 (for $U_c = 450$ VDC)	9 kW continuous 18 kW peak for 60s
Ground rule for power flow	$P_c = P_z$
Operation frequency level	15 kHz, in operation load-dependent reduction down to 7.5 kHz Manually adjustable up to 18 kHz
Max. recuperation of energy	Cycle time 1s: 1 energy module up to 4,32 MJ/operating hour 2 energy modules up to 8,64 MJ/operating hour
Load monitoring	DC link side and energy storage side (in each case I^2t)
Connection DC link	Front, top
Connection for PxtEX, EM or NEV	Front, bottom
Communication	3 digital In, 3 digital Out K-Bus interface for operating data output 4 LEDs, SD-Card, Reset-button for restart Boot-button for boot loading from SD-Card
Visualization	Charging indicator for each Energy module (flashing LED according to voltage level)
Firmware-Updates	On Koch company site (Fabrikle) or With SD-Card at customers site or Via PxtCC (USB K-Bus interface) with PC
Protection	Internal fuses Individual protection of each energy module
Precharging circuit	Connection directly to DC link interference-free possible, independent from further precharging circuits
Reverse polarity protection	To DC link: In case connecting with reverse polarity PxtFX blocks and disconnects the DC link side from energy storage side
Charging protection	To DC link

¹ Data refer to connection to a DC link of a drive controller with 400 V AC supply voltage. Other data on request.


We look forward to hearing from you!

Technical data PXTFX

Version December 09, 2020

Criteria	PXTFX
Charging protection switch LSS	Connection of charged Energy storage modules interference-free possible (But: No protection against connecting with reverse polarity!)
Max. cable length to DC link	2 m
Max. cable length to energy storage modules	20 m
Parallel operation	Theoretically unlimited number of devices Self-adjusting Automated Master-/Slave-setting for communication
Retrofit	Can be retrofitted into existing systems
Typeplate/Device information	Electronic via QR-Code and App (Android and iOS): Further device specific information Management-features
Internal digital storage	Operation hours meter

Installation dimensions

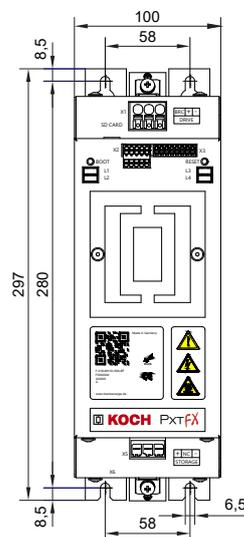

We look forward to hearing from you!



Michael Koch GmbH, Zum Grenzgraben 28, 76698 Ubstadt-Weiher
Tel. +49 7251 9626-200, www.brakeenergy.com, mail@bremsenergie.de

Subject to technical changes. MK_PRO_ANW-TEXTIL_ENG_R01_1

