

Brake resistor BWx200

Short-circuit proof, „intrinsicly safe“² resistor for use in inverters (brake transistors) in an aluminum case, IP65¹ protection class.



Rated power (W)
50 (100 with forced cooling)

Resistance (Ohm)
90

Dimensions (mm)
Enclosure: 105 x 22 x 36.5
Wiring: length 290±20
Ø AWG16 or 1.5 mm²
PTFE isolated,
UL Style 1659

Technical specifications
($\vartheta_A = 20^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Value	Unit	Conditions
Tolerance (resistance)		± 5	%	Room temperature
Temperature coefficient	TK	40 ... 65	10 ⁻⁶ /K	
Insulation resistance	R _{ISO}	≥ 100	MΩ	U _{mess} = 1,000 VDC
Inductance	L	≤ 30	μH	f = 300 kHz, U _{mess} = 50 mV
Capacity against enclosure	C	≤ 300	pF	f = 300 kHz, U _{mess} = 50 mV
Thermal time constant	τ	approx. 700	s	Heating phase free in air
		approx. 1,000		Cooling phase free in air
Weight	m	155	g	
Certifications	cURus ³			Standard CSA-C22.2 and UL508
Energy absorption	Q	2.4	kJ	with 1.2 s (1% duty cycle)
		3.6	kJ	with 7.2 s (6% duty cycle)
Maximum permissible operating voltage	U _B	≤ 700 AC	V	Taking into consideration the „intrinsic safety“ ²
		≤ 1,000 DC	V	according to UL
		≤ 600 AC	V	
		≤ 848 DC	V	
Isolation voltage	U _{iso}	≥ 4,000 AC	V	f = 50 Hz; t = 1 s
Max. permissible case temp.	ϑ _C	≤ 200	°C	in consideration of UL and forced cooling
Storage temperature	ϑ _S	-25 ... +85	°C	



Versions



BWD200



BWS200





BWS200 with customer specific connector

¹ Test conditions: Water jet from nozzle 6.3 mm inside diameter, flow rate 12.5 l / min +/- 5%, water pressure according to volume flow, distance 2.5-3m, test duration 3min.

² With fourfold type power and free convection. 1. no short-circuit, 2. no fault to frame, 3. self-extinguishing, 4. no melting of casing. Type power always corresponds to 35% duty cycle of the respective resistor type.

³ Certification only valid in customer specific application


Dimensions and mounting holes (mm)

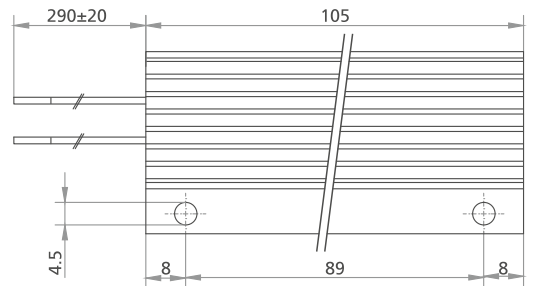

Pulse loading capacity

Brake resistor BWx200

— 120s / free in air

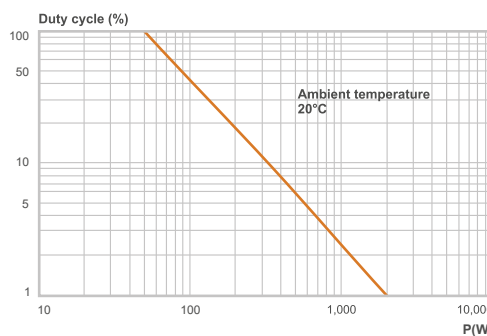

Case temperature

Brake resistor BWx200

profile temperature averaged with duty cycle ED = 100%
Maximum permissible temperature T = 250 °C

